





Notes:

1. ELECTRICAL :
  - A. IMPEDANCE : 50 OHM
  - B. FREQUENCY RANG : DC-2GHz
  - C. VSWR : 1.3 MAX.
2. ENVIRONMENT :
  - A. TEMP RANGE : -55°C TO +155°C
  - B. RoHS COMPLIANT

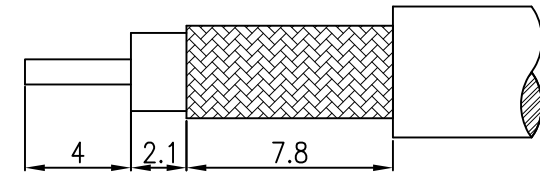

RECOMMENDED CABLE STRIPPING DIM'S

3/8-24UNF-2B

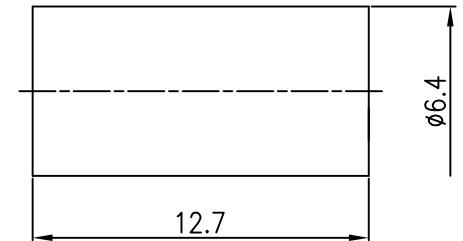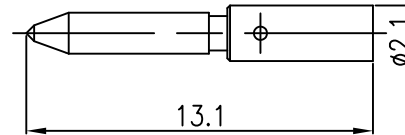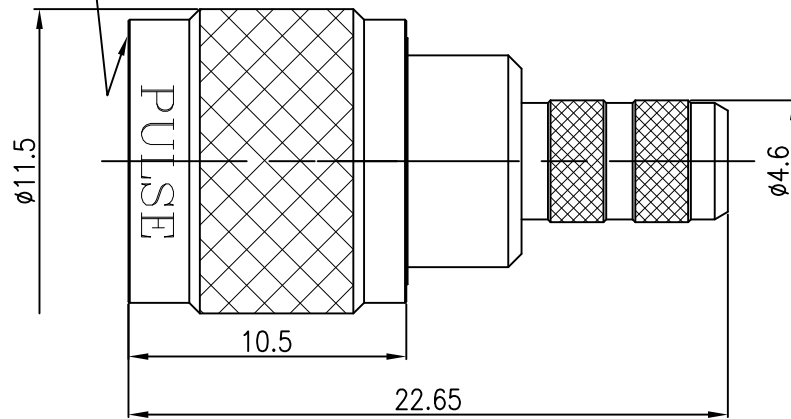

1. CRIMPED CONTACT PIN HEX CRIMP SIZE 1.69 (RCT-58S)
2. CRIMPED FERRULE HEX CRIMP SIZE 5.41 (RCT-58S)

NO.	NAME	MATERIAL	FINISH	Q.TY	DIMENSIONS ARE IN MILLIMETERS UNLESS STATED OTHERWISE. TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4	SIZE	APPROVALS		DATE	TITLE	MUHF CRIMP PLUG (FOR RG-58/U,141/U,303/U)		
⑥	RETAINER RING	BRASS	Dα	1		7 : 2	DRAW	Nico L	031014	MODEL	MUHF-C3611101R4	REV.	D
⑤	FERRULE	BRASS	NICKEL	1		UNIT							
④	CONTACT PIN	BRASS	GOLD	1		mm	CHECK	River H	031014	DWG No	MPL-604	REV.	
③	SHELL	BRASS	NICKEL	1		PROJECT							
②	INSULATOR	PTFE	NATURAL	1		APPROVE	Derek A	042117		PULSE CONNECTORS			
①	BODY	BRASS	NICKEL	1									